

# Dynapar brand Encoder Series HS20 Sealed Hollow Shaft



## Technical Bulletin

**Bulletin Number:** 702375-0001

**Revision Level:** L

**Date:** September 16 2019



1675 Delany Road  
Gurnee, IL 60031-1282

Phone: 847.662.2666

Fax: 847.662.4150

**Application Assistance 1.800.234.8731**

### DESCRIPTION

The Dynapar brand Series HS20 Sealed Hollowshaft encoder is designed for easy installation on motor or machine shafts. Its hollowshaft design eliminates the need for a flexible shaft coupling, mounting bracket, flower pot, or flange adapter. This not only reduces the installation depth, but also lowers total cost.

The Series HS20 Sealed Hollowshaft's floating shaft mount and spring tether minimize bearing loads and eliminate flexible shaft couplings to reduce wear and maintenance.

### SPECIFICATIONS

#### STANDARD OPERATING CHARACTERISTICS

**Code:** Incremental

**Resolution:** 50 to 2540 PPR (pulses/revolution)

**Accuracy:** (worst case any edge to any other edge) <1024 PPR (metal disk):  $\pm 7.5$  arc-min.

$\geq 1024$  PPR (glass disk):  $\pm 2.5$  arc-min.

**Format:** Two channel quadrature (AB) with optional Index (Z) and complementary outputs

**Phase Sense:** A leads B for CCW shaft rotation viewing the hub clamp end of the encoder

**Quadrature Phasing:**  $90^\circ \pm 22.5^\circ$  electrical

**Symmetry:**  $180^\circ \pm 18^\circ$  electrical

**Index:**  $180^\circ$   $\pm 18^\circ$ - $135^\circ$  electrical (gated with B low)

**Waveforms:** Squarewave with rise and fall times less than 1 microsecond into a load capacitance of 1000 pf

#### ELECTRICAL

##### Input Power:

5 to 26 VDC at 100 mA max., not including output loads

##### Outputs:

7273 Open Collector: 30 VDC max., 40 mA sink max.

7272 Push-Pull and Differential Line

Driver: 40 mA sink or source

**Frequency Response:** 100 kHz min. (index 75 kHz min. for extended temperature range)

**Electrical Protection:** Overvoltage, reverse voltage and output short circuit protected

**Noise Immunity:** Tested to EN61326-1 EMC (Heavy Industrial) for Electro Static Discharge, Radio Frequency Interference, Electrical Fast Transients, Conducted and Magnetic Interference

##### Mating Connector:

6 pin, style MS3106A-14S-6S (MCN-N4);

7 pin, style MS3106A-16S-1S (MCN-N5);

10 pin, style MS3106A-18-1S (MCN-N6);

Cable w/ 5 pin M12 Connector (112859-xxxx)

Cable w/ 8 pin M12 Connector (112860-xxxx)

#### MECHANICAL

**Bearing Life:** (at maximum tether loading) Standard tether:  $5 \times 10^9$  revolutions

Slotted tether:  $8 \times 10^9$  revolutions

**Shaft Speed:** 6000 RPM max.

**Shaft Bore Tolerance:** Nominal  $+0.0002''/+0.0008''$  ( $+0.005/+0.020$  mm)

##### Mating Shaft Requirements:

Runout:  $\pm 0.005''$  ( $\pm 0.13$ mm) radial, max.

Endplay:  $\pm 0.050''$  ( $\pm 1.27$  mm) axial, max.

Length:  $0.80''$  (20 mm), minimum

**Starting Torque:** 12.0 oz-in max.

**Moment of Inertia:**  $5.1 \times 10^{-4}$  oz-in-sec<sup>2</sup>

**Weight:** 10 oz. max.

#### ENVIRONMENTAL

##### Operating Temperature:

Standard: 0 to  $+70^\circ$  C

Extended: 0 to  $+85^\circ$  C

**Storage Temperature:**  $-40$  to  $+85^\circ$  C

**Shock:** 50 G's for 11 milliseconds duration

**Vibration:** 5 to 2000 Hz at 2.5 G's

**Humidity:** to 98% without condensation

**Enclosure Rating:** NEMA4/IP65 (dust proof, washdown)

## IMPORTANT ENCODER INSTALLATION INFORMATION

**Mounting the Encoder:** The encoder should be mounted such that its shaft is in close as possible alignment with the axis of the driving machine or motor shaft.

***CAUTION: The loads applied to the encoder shaft must be in accordance with the specifications of this device.***

**Important Wiring Instructions:** Use of shielded cable is recommended for all encoder installations. The shield should be connected to signal-ground at the receiving device only.

**Grounding:** For applications with high ground potential differences, DO NOT ground the encoder through both machine and controls end. Connect the shield at the controls end only. NOTE: If the shield is connected at both ends, grounding problems that degrade system performance can result.

**CE Grounding Measures** – For best EMC immunity the cable screen must be grounded on both encoder and controls end. For cable lengths longer than 30m or outdoor applications, additional measures must be implemented to comply with CE requirements. Connection of the encoder to DC power supply network is prohibited if CE compliance is required. CE-compliant products are tested to EN61326-1 EMC.

In all cases, system CE compliance is ultimately the responsibility of the manufacturer integrating the encoder.

***Connecting the shield at both ends can cause grounding problems that degrade system performance.***


If possible, run the encoder cable through a dedicated conduit (not shared with other wiring). Use of conduit will protect the cable from physical damage and provide a degree of electrical isolation. Do not run the cable in close proximity to other conductors that carry current to heavy loads such as motors, motor starters, contactors, solenoids, etc. This practice can induce electrical transients in the encoder cable, potentially interfering with reliable data transmission.

Refer to Electrical Connections table for wiring information. To avoid possible damage, do not connect or disconnect the encoder connector or wiring while power is applied to the system.


***CAUTION: Unused encoder signal wires must be individually insulated and under no circumstances be in contact with ground, voltage sources, or other signal lines.***

# Dimensions

## DIMENSIONS




## CODE 7: TERMINATION

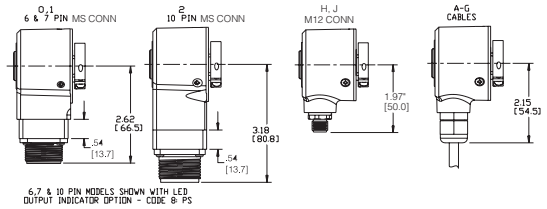

6, 7 & 10 PIN MODELS SHOWN WITH LED OUTPUT INDICATOR OPTION - CODE 8 PS

## CODE 4: FIXING

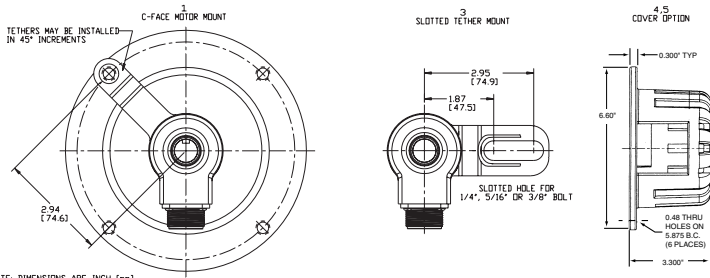

NOTE: DIMENSIONS ARE INCH [mm]

# Models Information

Code 1: Model	Code 2: PPR	Code 3: Bore Size	Code 4: Fixing	Code 5: Format	Code 6: Output	Code 7: Termination	Code 8: Options
<b>HS20</b>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>
<b>Ordering Information</b>							
<b>HS20</b> Size 20 heavy-duty, sealed hollow shaft encoder	Metal Disk: <b>0050 0300</b> <b>0060 0360</b> <b>0100 0400</b> <b>0180 0720</b> <b>0200 0800</b> <b>0250 1000</b> <b>0256 1024</b>  Glass Disk: <b>1200 2000</b> <b>1250 2048</b> <b>1270 2400</b> <b>1600 2500</b> <b>1800 2540</b> <b>1968</b>	<b>0</b> 6 mm <b>1</b> 1/4" <b>2</b> 5/16" <b>3</b> 8 mm <b>4</b> 3/8" <b>5</b> 10 mm <b>6</b> 12 mm <b>7</b> 1/2" <b>8</b> 5/8" <b>9</b> 15 mm <b>A</b> 16 mm <b>B</b> 14 mm	<b>0</b> None - customer supplied <b>1</b> Clearance hole for 3/8" bolt on 5.88" dia. bolt circle (to fit 4-1/2" NEMA C-face) <b>3</b> Slotted hole for bolt on 1.87" to 2.95" radius <b>4</b> Same as '1', w/ protective cover kit <b>5</b> Same as '3', w/ Protective cover kit	<b>0</b> single ended, unidirectional (A) <b>1</b> single ended, bidirectional (AB) <b>2</b> single ended, bidirectional with index (ABZ)  Available when Code 6 is 3, 4, A or B: <b>3</b> differential, bidirectional (AA BB)  Available when Code 6 is 3, 4, A or B and code 7 is 2, or 7 thru G or J <b>4</b> differential, bidirectional with index (AA BB ZZ)	<b>0</b> 5-26V in, 5-26V open collector out <b>1</b> 5-26V in, 5-26V open collector out w/ 2.2kΩ pullups <b>2</b> 5-26V in, 5-26V push-pull out  Available when Code 5 is 3 or 4: <b>3</b> 5-26V in, 5V line driver out <b>4</b> 5-26V in, 5-26V line driver out <b>A</b> same as '3' with extended temp. <b>B</b> same as '4' with extended temp.	<b>0</b> 6 pin connector <b>1</b> 7 pin connector <b>2</b> 10 pin connector <b>5</b> 6 pin connector, plus mating connector <b>6</b> 7 pin connector, plus mating connector <b>7</b> 10 pin connector, plus mating connector <b>A</b> 18" cable <b>B</b> 36" cable <b>C</b> 72" cable <b>D</b> 10' cable <b>F</b> 13" cable with 10 pin connector plus mating connector <b>G</b> 13" cable <b>J</b> 8 Pin M12 Connector  Available when Code 5 is 0 thru 2 <b>H</b> 5 Pin M12 Connector	Available when Code 7 is 0 thru 7:  <b>PS</b> LED Output Indicator
112096-0001TetherKit(clearanceholefor3/8"bolton5.88"diamboltoncircle) 112096-0002TetherKit(slottedholeforbolton1.87"to2.75"radius) 112105-0001ProtectiveCoverAccessory							

## Wiring Information

### 6, 7 & 10 Pin MS Connectors and Cables - Code 7= 0 to 7, A to G

Connector & mate/accessory cable assembly pin numbers and wire color information is provided here for reference. HS20 models with direct cable exit carry the same color coding as shown for each output configuration.

Encoder Function	Cable #108594-* 6 Pin Single Ended		Cable #112123-* 6 Pin Dif Line Drv w/o Idx		Cable #108596-* 7 Pin Dif Line Drv w/o Idx		Cable #108595-* 7 Pin (If Used)		Cable #1400635-* 10 Pin (If Used)	
	Pin	Wire Color	Pin	Wire Color	Pin	Wire Color	Pin	Wire Color	Pin	Wire Color
Sig. A	E	BRN	E	BRN	A	BRN	A	BRN	A	BRN
Sig. B	D	ORN	D	ORN	B	ORN	B	ORN	B	ORN
†Sig. Z	C	YEL	—	—	—	—	C	YEL	C	YEL
Power +V	B	RED	B	RED	D	RED	D	RED	D	RED
N/C	F	—	—	—	—	—	E	—	E	—
Com	A	BLK	A	BLK	F	BLK	F	BLK	F	BLK
Case	—	—	—	—	G	GRN	G	GRN	G	GRN
Sig. A	—	—	C	BRN/WHT	C	BRN/WHT	—	—	H	BRN/WHT
Sig. B	—	—	F	ORN/WHT	E	ORN/WHT	—	—	I	ORN/WHT
†Sig. Z	—	—	—	—	—	—	—	—	J	YEL/WHT

**Cable Configuration:** PVC jacket, 105 °C rated, overall foil shield; 3 twisted pairs 26 AWG (output signals), plus 2 twisted pairs 24 AWG (input power)

### 5 & 8 Pin M12 Accessory Cables when Code 7= H or J

Connector pin numbers and cable assembly wire color information is provided here for reference.

Encoder Function	Cable # 112859-* 5 Pin Single Ended		Cable # 112860-* 8 Pin Single Ended		Cable # 112860-* 8 Pin Differential	
	Pin	Wire Color	Pin	Wire Color	Pin	Wire Color
Sig. A	4	BLK	1	BRN	1	BRN
Sig. B	2	WHT	4	ORG	4	ORG
†Sig. Z	5	GRY	6	YEL	6	YEL
Power +V	1	BRN	2	RED	2	RED
Com	3	BLU	7	BLK	7	BLK
Sig. A	—	—	—	—	3	BRN/WHT
Sig. B	—	—	—	—	5	ORG/WHT
†Sig. Z	—	—	—	—	8	YEL/WHT

**Cable Configuration:** PVC jacket, 105 °C rated, overall foil shield; 24 AWG conductors, minimum

\*Note: Standard cable length is 10 feet but may be ordered in any length in 5 foot increment. For example, -0020 is a 20 foot cable.

†Note: Index not provided on all models. See ordering information

See "Accessories" Section for Connectors and Cable Assemblies Ordering Information



#### Customer Service:

Tel.: +1.800.873.8731  
Fax: +1.847.662.4150  
custserv@dynapar.com

#### Technical Support

Tel.: +1.800.234.8731  
Fax: +1.847.662.4150  
northstar.techsupport@dynapar.com

#### European Sales Representative

Hengstler GmbH  
Umlandstrasse 49, 78554 Aldingen  
Germany  
www.hengstler.com