

SERIES ISW38

NorthStar™ brand

Hazardous Duty Encoder

Key Features

- Draw Works Threaded Shaft with Field Replaceable Adapters for Reduced Downtime
- ATEX and CSA Certified for Hazardous Duty Applications
- Dual Isolated Outputs Available for Redundancy
- Anodized Aluminum or Stainless Steel Housing
- NAMUR Sensor Output Available



SPECIFICATIONS

STANDARD OPERATING CHARACTERISTICS

Code: Incremental, Optical

Resolution: 1 to 5000 PPR (pulses/revolution)

Format: Two channel quadrature (AB) with optional Index (Z), and complementary outputs

Phase Sense: A leads B for CCW shaft rotation viewing the shaft clamp end of the encoder

Quadrature Phasing: For resolutions 200 to 300 PPR and 1200 PPR and above: 90° ±30° electrical; all other resolutions: 90° ±15°

Symmetry:

For resolutions 200-300PPR and above 1024 PPR: 180° ±25° electrical; all other resolutions: 180° ±18°

Index: 150° to 330° A Leads B, CCW (From Shaft End)

Waveforms: Squarewave with rise and fall times less than 1 microsecond into a load capacitance of 1000 pf

ELECTRICAL

Input Power: 5VDC, 7-26VDC

Outputs:

2N2222 Open Collector: 250mA, sink max

7272 Push-Pull: 40mA, sink or source

7272 Differential Line Driver: 40 mA, sink or source

7273 Open Collector: 40mA, sink max

Frequency Response: 125 kHz (data & index)

Noise Immunity: Tested to EN61326-1

Electrical Immunity: Reverse polarity and short circuit protected

Termination: 6, 7, or 10 pin MS Connector; Cable exit w/seal

Mating Connector:

6 pin, style MS3106A-14S-6S (MCN-N4);

7 pin, style MS3106A-16S-1S (MCN-N5);

10 pin, style MS3106A-18-1S (MCN-N6);

10 pin, NEMA 4 style (MCN-N6N4)

12 pin CW, M23 Connector (MCN-C1)

MECHANICAL

Shaft Sizes:

1"-14 UNS x 5/8" - 18 UNF Threaded Shaft;

1"-14 UNS Threaded Shaft;

1"-14 UNS x 5/8" - 18 UNF Field Replaceable Threaded Shaft

Mounting Configuration: Hollow Bore, direct mount over shaft with multiple tether options available

Shaft Speed: 6000 RPM max

Bore Loading: Up to 20 lbs axial and radial

Bore Runout: 0.0005 TIR at midpoint

Starting Torque: 4.5 in-oz. max (at 25°C)

Running Torque: 4.0 in-oz. max (at 25°C)

Bearings: 61806-ZZ

Housing and Cover: Hard Anodized Aluminum. Also available in Electroless Nickel finish and Stainless Steel

Shaft Material: 300 series stainless steel

Disc Material: Mylar

Weight: 35 ounces, typical

ENVIRONMENTAL

Operating Temperature: -40 to 80°C

Storage temperature: -40 to 100°C

Shock: 400g for 6msec duration

Vibration: 5 to 3000Hz @ 20g


Humidity: Up to 98% (non-condensing)

Enclosure Rating: IP67

DATA AND INDEX

Not all complements shown

\bar{A} shown for reference

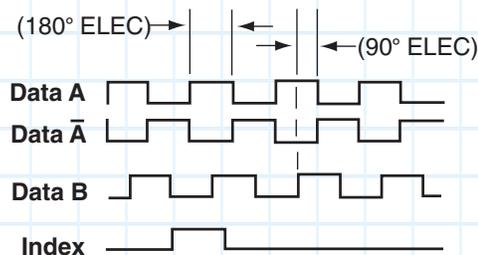

Index Width: 150° to 330°

A leads B, CCW (From Shaft End)

Ordering Information

To order, complete the model number with code numbers from the table below:

Code 1: Model	Code 2: PPR	Code 3: Shaft	Code 4: Output Format	Code 5: Termination	Code 6: Options
ISW38	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Ordering Information							
ISW38 Hazardous Duty Encoder	0015	1000	0 1"-14 UNS x 5/8" - 18 UNF Threaded Shaft	A Single Ended ABZ, 7-26V in, 7-26V out push-pull (7272)	0 6 pin connector 1 7 pin connector 2 10 pin connector 3 12 pin connector 5 6 pin+mating connector 6 7 pin+mating connector 7 10 pin+mating connector 8 12 pin+mating connector A .5m (18") cable C 1m (36") cable D 2m (72") cable H 5 pin M12 connector J 8 pin M12 connector K 1.5 ft (18") cable w/ in line 10pin connector M 5 ft (60") cable N 10 ft (120") cable	0 Aluminum Housing 1 Nickel Finish Housing 2 Stainless Steel Housing 3 Dual Isolated Outputs, Aluminum Housing 4 Dual Isolated Outputs, Nickel Housing 5 Dual Isolated Outputs, Stainless Steel Housing	
	0032	1024		C Single Ended ABZ, 5V in, 5V out push-pull (7272)			
	0050	1200		D Single Ended ABZ, 7-26V in, 5V out push-pull (7272)			
	0060	2000		E Single Ended ABZ, 7-26V in, 7-26V out Open Collector (7273)			
	0100	2048	1 1"-14 UNS Threaded Shaft	F Single Ended ABZ, 7-26V in, 7-26V out Open Collector (2222)			
	0200	4000		G Single Ended ABZ, 7-26V in, 7-26V out Open Collector w/ 1kOhm (2222)			
	0240	4096		2 1"-14 UNS x 5/8" - 18 UNF Field Replace- able Threaded Shaft	<i>Options H, J & K not available when Code 5 is H</i>		
	0250	5000			<i>Options L, M, P not available when Code 5 is 0, 1, 5, 6, H</i>		
	0500			H Differential AB only, 5V in, 5V out (7272)			
	0512			J Differential AB only, 7-26 in, 7-26 out (7272)			
	0600			K Differential AB only, 7-26 in, 5V out (7272)			
				<i>Option N available only when Code 2 is 0015</i>			
				N Namur output, 15mA max			
				† NOTE: Simultaneous use of redundant outputs may void ATEX certification. Consult factory for details.			

Accessories:

Cable Assemblies with MS Connector*

- 108594-XXXX** 6 Pin MS, Cable Assy. For Use with Single Ended Outputs
- 108595-XXXX** 7 Pin MS, Cable Assy. For Use with Single Ended Outputs
- 108596-XXXX** 7 Pin MS, Cable Assy. For Use with Differential Line Driver w/o Index Outputs
- 1400635XXXX** 10 Pin MS, Cable Assy. For Use with Differential Line Driver with Index Outputs
- 109209-XXXX** NEMA4 10 pin MS, Cable Assy. For use with differential line driver with index outputs

Cable Assemblies with M23 Connector*

- 115901-XXXX** 12 pin M23, Cable Assy. For Use with Differential Line Driver with Index Outputs, CW

Cable Assemblies with M12 Connector*

- 112859-XXXX** 5 Pin M12, Cable Assy. For Use with Single Ended Outputs
- 112860-XXXX** 8 Pin M12, Cable Assy. For Use with Single Ended Outputs
- 112860-XXXX** 8 Pin M12, Cable Assy. For Use with Differential Line Driver Outputs

Mating Connectors (no cable)

- 6 Pin, Style MS3106A-14S-6S (MCN-N4)
- 7 Pin, Style MS3106A-16S-1S (MCN-N5)
- 10 Pin, Style MS3106A-18-1S (MCN-N6)
- 10 Pin, NEMA 4 Style (MCN-N6N4)
- 12 Pin CW M23 Connector (MCN-C1)

*Note: Standard cable length is 10 feet but may be ordered in any length in 5 foot increments. For example, for a 20 foot cable, replace XXXX with -0020.

SERIES ISW38



ELECTRICAL CONNECTIONS

6, 7 & 10 Pin MS Connectors and Cables

Connector & mate/accessory cable assembly pin numbers and wire color information is provided here for reference. Models with direct cable exit carry the color coding as shown in the right hand column.

Table 1											
Encoder Function	Cable # 108594-XXXX 6 Pin Single Ended		Cable # 108595-XXXX 7 Pin Single Ended		Cable # 108596-XXXX 7 Pin Dif Line Driver w/o Index		** Cable # 1400635XXXX ** Cable # 109209-XXXX 10 Pin Dif Line Driver with Index		Cable # 115901-XXXX 12 Pin Differential Line Driver with Index		Cable Exit with Seal
	Pin	Wire Color Code	Pin	Wire Color Code	Pin	Wire Color Code	Pin	Wire Color Code	Pin	Wire Color Code	Wire Color Code
Signal A	E	BRN	A	BRN	A	BRN	A	BRN	5	BRN	GRN
Signal B	D	ORN	B	ORG	B	ORG	B	ORG	8	ORG	BLU
Signal Z*	C	YEL	C	YEL	—	—	C	YEL	3	YEL	ORG
Power +V	B	RED	D	RED	D	RED	D	RED	12	RED	RED
Com	A	BLK	F	BLK	F	BLK	F	BLK	10	BLK	BLK
Case	—	GRN	G	GRN	G	GRN	G	GRN	9	—	WHT
N/C-Shield	F	—	E	—	—	—	E	—	7	—	—
Signal \bar{A}	—	—	—	—	C	BRN/WHT	H	BRN/WHT	6	BRN/WHT	VIO
Signal \bar{B}	—	—	—	—	E	ORG/WHT	I	ORG/WHT	1	ORG/WHT	BRN
Signal \bar{Z} *	—	—	—	—	—	—	J	YEL/WHT	4	YEL/WHT	YEL

5 & 8 Pin M12 Accessory Cables when Code 5 = H or J

Connector pin numbers and cable assembly wire color information is provided here for reference.


Table 2						
Encoder Function	Cable # 112859-XXXX 5 Pin Single Ended		Cable # 112860-XXXX 8 Pin Single Ended		Cable # 112860-XXXX 8 Pin Differential	
	Pin	Wire Color Code	Pin	Wire Color Code	Pin	Wire Color Code
Signal A	4	BLK	1	BRN	1	BRN
Signal B	2	WHT	4	ORG	4	ORG
Signal Z*	5	GRY	6	YEL	6	YEL
Power +V	1	BRN	2	RED	2	RED
Com	3	BLU	7	BLK	7	BLK
Signal \bar{A}	—	—	—	—	3	BRN/WHT
Signal \bar{B}	—	—	—	—	5	ORG/WHT
Signal \bar{Z} *	—	—	—	—	8	YEL/WHT

NOTES:


- 1) Cable Configuration (**Table 1**): PVC jacket, 105 °C rated, overall foil shield; 3 twisted pairs 24 AWG (output signals), plus 2 twisted pairs 22 AWG (input power)
- 2) Cable Configuration (**Table 2**): PVC jacket, 105°C rated, overall foil shield; 24 AWG conductors, minimum
- 3) Standard cable length is 10 feet but may be ordered in any length in 5 foot increments. For example, for a 20 foot cable, replace -XXXX with -0020
- 4) *Index not provided on all models. See ordering information.
- 5) **For watertight applications, use NEMA4 10 pin cable & connector 1400635XXXX or 109209-XXXX.
- 6) "MS" Type mating connectors and pre-build cables are rated NEMA 12
- 7) "M12" Cable assemblies are rated IP67

DIMENSIONS inches [mm]


With Convertible Shaft

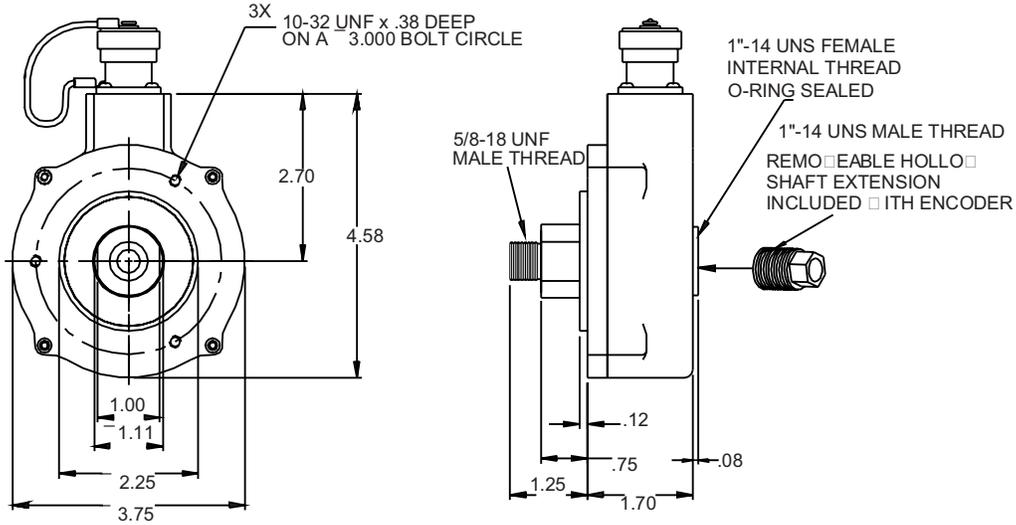

With Non-Convertible Shaft

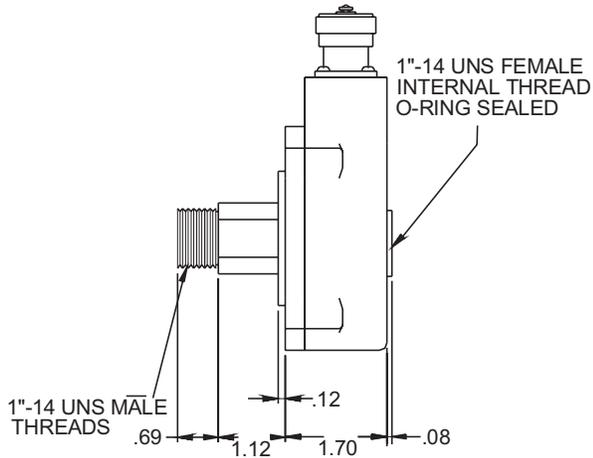

Redundant Version

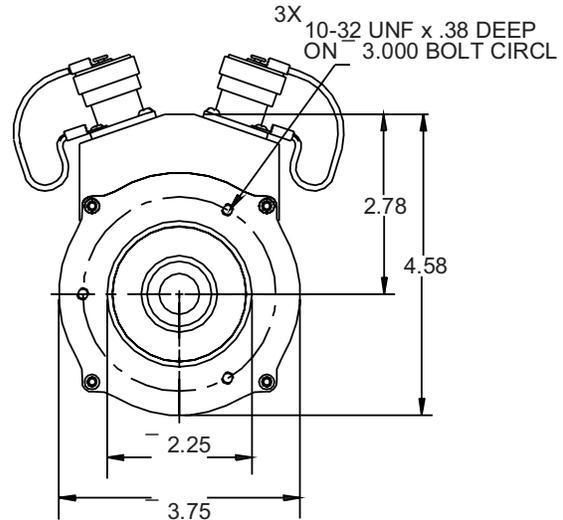

Headquarters: 1675 Delany Road • Gurnee, IL 60031-1282 • USA

Customer Service:
Tel.: +1.800.873.8731
Fax: +1.847.662.4150
custserv@dynapar.com

Technical Support
Tel.: +1.800.234.8731
Fax: +1.847.662.4150
northstar.techsupport@dynapar.com

European Sales Representative
Hengstler GmbH
Uhlandstrasse 49, 78554 Aldingen
Germany
www.hengstler.com